


SMART PRESSURE TRANSMITTER PCE-28.SMART


NEW




- ✓ 4...20 mA output signal + HART protocol
- ✓ ATEX Intrinsic safety
- ✓ Accuracy 0.1%



PD type electrical connection, IP-65
Connector DIN 43650




PZ type electrical connection, IP-66



PM12 type electrical connection, IP-67




SG type electrical connection, IP-68
Length of cable: according client specification.

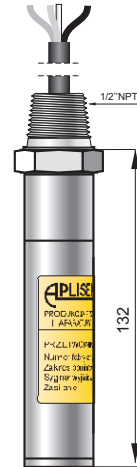


SGM type electrical connection, IP-68
Length of cable: according client specification.


NEW




G1/2 type M type
G1/2", Ø4 hole
M20×1.5, Ø4 hole



1/2" NPT type
1/2" NPT male + internal thread G1/4"




GP type P type
G1/2", Ø12 hole
M20×1.5, Ø12 hole




1/2" NPT F type
internal thread 1/2-14NPT

NEW



CG1 type
G1" with flush diaphragm



CM30×2 type
M30×2 with flush diaphragm

Application

PCE-28.SMART pressure transmitter is applicable to the measurement of the pressure, underpressure and absolute pressure of gases, vapours and liquids. The active sensing element is a piezoresistant silicon sensor separated from the medium by a diaphragm and by specially selected type of manometric liquid.

Communication

The communication standard for data interchange with the transmitter is the HART protocol.

Communication with the transmitter is carried out with:

- ◇ a KAP-03 communicator,
- ◇ some other Hart type communicators,
- ◇ a PC using an RS-HART converter and RAPORT 2 configuration software.

The data interchange with the transmitter enables the users to:

- ◇ identify the transmitter;

- ◇ configure the output parameters:

- measurement units and the values of the start points and end points at the measurement range;
- damping time constant;
- conversion characteristic (inversion, user's non-linear characteristic);

- ◇ read the currently measured pressure value of the output current and the percentage output control level;

- ◇ force an output current with a set value;

- ◇ calibrate the transmitter in relation to a model pressure.

Installation

The transmitter is not heavy, so it can be installed on the installation. When the pressure of steam or other hot media is measured, a siphon or impulse line should be used. The needle valve placed upstream the transmitter simplifies installation process and enables the zero point adjustment or the transmitter replacement. The transmitter's electrical connections should be performed with twisted cable. The place for the communicator should be assigned before the communicator installation.

Measuring ranges

No.	Nominal measuring range (FSO)	Minimum set range	Rangeability	Overpressure limit (without hysteresis)**
1	0...1000 bar (0..100 MPa)	10 bar (1MPa)	100:1	1200 bar (120 MPa)
2	0..300 bar (0..30 MPa)	3 bar (300 kPa)	100:1	450 bar (45 MPa)
3	0..160 bar (0..16 MPa)	1,6 bar (160 kPa)	100:1	450 bar (45 MPa)
4	0...70 bar (0...7 MPa)	0.7 bar (70 kPa)	100:1	140 bar (14 MPa)
5	0...25 bar (0...2.5 MPa)	0.25 bar (25 kPa)	100:1	50 bar (5 MPa)
6	0...7 bar (0...0.7 MPa)	0.07 bar (7 kPa)	100:1	14 bar (1.4 MPa)
7	-1...6 bar (-100...600kPa)	300mbar (30 kPa)	23:1	14 bar (1.4 MPa)
8	0...2 bar (0...200 kPa)	100 mbar (10 kPa)	20:1	4 bar (400 kPa)
9	0...1 bar (0...100 kPa)	50 mbar (5 kPa)	20:1	2 bar (200 kPa)
10	-0.5...0.5 bar (-50...50 kPa)	50 mbar (5 kPa)	20:1	2 bar (200 kPa)
11	0...0.25 bar (0...25 kPa)	25 mbar (2.5 kPa)	10:1	1 bar (100 kPa)
12	-100...100 mbar (-10...10 kPa)	20 mbar (2 kPa)	10:1	1 bar (100 kPa)
13	-15...70 mbar (-1.5...7 kPa)	5 mbar (0.5 kPa)	17:1	0.5 bar (50 kPa)
14	0...1.3 bar abs (0...130 kPa abs)	100 mbar abs (10 kPa abs)	13:1	2 bar (200 kPa)
15	0...7 bar abs (0...0,7 MPa abs)	0.07 bar abs (7 kPa abs)	100:1	14 bar (1.4 MPa)
16	0...25 bar abs (0...2.5 MPa abs)	0.25 bar abs (25 kPa abs)	100:1	50 bar (5 MPa)
17	0...70 bar abs (0...7 MPa abs)	0.7 bar abs (70 kPa abs)	100:1	140 bar (14 MPa)

Technical data

Metrological parameters

Accuracy	≤ ±0.1% of calibrated range
Long-term stability (for the basic range)	≤ accuracy for 3 years
Thermal error	< ±0.08% (FSO) / 10°C (0.1% for ranges 12, 13) max. ±0.25% (FSO) in the whole compensation range (0.4% for ranges 12, 13)
Thermal compensation range	-25...80°C -40...80°C – special version
Time Constant	300 ms
Additional electronic damping	0...60 s
Error due to supply voltage changes	0.002% (FSO) / V

Electrical parameters

Power supply	10.5...36 V DC (EEx 12...28 V)
Output signal	4...20 mA, two wire transmission
Load resistance	$R[\Omega] \leq \frac{U_{sup}[V] - 10.5V}{0.02A} \cdot 0.85$
Resistance required for communication	240...1100 Ω

Materials

Wetted parts and diaphragms: 316Lss, Hastelloy C 276, Au

Casing: 304ss

Optional: 316ss

Operating conditions

Operating temperature range (ambient temp.) -40...85°C

EEx version -40...65°C

Medium temperature range -40...120°C

over 120°C – measurement with the use of impulse line or diaphragm seals

CAUTION: the medium must not be allowed to freeze in the impulse line or close to the process connection of the transmitter

Ordering Procedure

Model	Code	Description	
PCE-28.SMART		Smart Pressure Transmitter.	
Versions, certificates* *) more than one option is available	/Exia..... /MR..... /Tlen..... /-40...+80C.....	Ex II 1/2G Ga/Gb Ex ia IIC T4/T5/T6, I M1 Ex ia I, II 1D Ex ia D20 T105C (only for transmitters with 4..20mA out). Marine certificate - DNV For oxygen service(sensor filled with Fluorolube fluid, only M,G1/2 pr. conn.) Extended thermal compensation range -40 - 80°C	
Nominal measuring range		Range	Min. set range
	/0+1000bar.....	0+1000bar (0+100MPa)	10bar (1MPa)
	/0+300bar.....	0+300bar (0+30MPa)	3bar (300kPa)
	/0+160bar**.....	0+160bar (0+16MPa)	1,6 bar (160kPa)
	/0+70bar.....	0+70bar (0+7MPa)	0,7bar (70kPa)
	/0+25bar.....	0+.25bar (0+2,5MPa)	0,25bar (25kPa)
	/0+7bar.....	0+7bar (0+700kPa)	0,07bar(7kPa)
	/0+2bar.....	0+2bar (0+200kPa)	100mbar (10kPa)
	/0+1bar.....	0+1bar (0+100kPa)	50mbar (5kPa)
	/0+0,25bar.....	0+0,25bar (0+25kPa)	25mbar (2,5kPa)
	/-0,5+ +0,5bar.....	-0,5+0,5bar (-50+50kPa)	50mbar (5kPa)
	/-1+6bar.....	-1+6bar (-100+600kPa)	300mbar (30kPa)
	/-100+100mbar.....	-100+100mbar (-10+10kPa)	20mbar (2kPa)
	/-15+70mbar.....	-15+70mbar (-1,5+7kPa)	5mbar (0,5kPa)
	/0+1.3bar ABS.....	0+1.3bar absolute pressure (0+130kPa abs)	100mbar abs (10kPa abs)
/0+7barABS.....	0+7bar absolute pressure (0+700kPa abs)	0,07bar abs (7kPa abs)	
**) non-standard ranges available on request	/0+25barABS.....	0+25bar absolute pressure (0+2.5MPa abs)	0,25bar abs (25kPa abs)
	/0+70bar ABS.....	0+70bar absolute pressure (0+7MPa abs)	0,7bar abs (70kPa abs)
Measuring set range	/...÷... [required units]	Start and end of calibrated range in relation to 4mA and 20mA output	
Casing, Electrical connection,	⇒ /PD..... /PZ..... /PZ/316..... /PM12..... /SG..... /SGM.....	Housing Ip65 with DIN43650 connector. 304SS housing, IP66, packing gland M20x1,5. 316SS housing, IP66, packing gland M20x1,5. Housing IP67 with thread M12x1 and connector 304SS housing, IP68, cable electrical connection 304SS housing, IP68, cable electrical connection	
Process connections	⇒ /M..... /M.(Au)..... /G1/2..... /G1/2"(Au)..... /P..... /P. (Hastelloy)..... /GP..... /GP (Hastelloy)..... /CM30x2..... /CM30x2 (Hastelloy)..... /CG1"..... /CG1/2"..... /1/2"NPT M..... /1/2"NPT F..... /1/4"NPT F.....	Thread M20x1,5 (male) with Ø4hole, wetted parts SS316L Thread M20x1,5 (male) with Ø4hole, gold plated diaphragm (range no. 1, 2, 3, 4) Thread G1/2" (male) with Ø4hole , wetted parts SS316L Thread G1/2" (male) with Ø4hole , gold plated diaphragm (range no. 1, 2, 3, 4) Thread M20x1,5 (male) with Ø12hole, wetted parts SS316L Thread M20x1,5 (male) with Ø12hole, wetted parts Hastelloy C 276 Thread G1/2" (male) with Ø12hole , wetted parts SS316L Thread G1/2" (male) with Ø12hole , wetted parts Hastelloy C 276 Thread M30x2 with flush diaphragm, wetted parts SS316L (Pressure limits: min. 0,1bar / max. 70bar) Thread M30x2 with flush diaphragm, wetted parts Hastelloy C 276 (Pressure limits: min. 0,1bar / max. 70bar) Thread G1" with flush diaphragm, wetted parts SS316L (Pressure limits: min. 0,1bar / max. 70bar) Thread G1/2" with flush diaphragm, wetted parts SS316L (Pressure limits: min. 2,5bar / max. 600bar) Thread ½"NPT Male, wetted parts SS316L Thread 1/2 -14NPT Female, wetted parts SS316L Thread 1/4 -18NPT Female, wetted parts SS316L	
Other specification	/.....	Description of required parameters e.g. non-standard process connection G3/4" or M22x1.5	
The most typical specification is marked by "⇒" mark.			

Example : Pressure transmitter , output 4..20mA + HART, version EExia, nominal measuring range 0..7bar, calibrated range 0..6bar, process connection ½"NPT male, electrical connection DIN43650 connector.

PCE-28.SMART/EExia/0..7bar/0..6bar/PD/1/2"NPTM